

## BIOWEB-B2

### Web Enabled Attendance & Access Control Terminal



Fingerprint



RFID Card



TCP/IP



USB Host



Access Control



Web

BIOWEB B2 is a single door biometric reader controller which design with Web Server to help system operator to configure, manage thier own fingerprint access control system. Ideally, BF-631W is used to manage single entrance security, or for a small enterprise as a simple time attendance recorder with Fingerprint security or RFID card, Password as a 3-in-1 access control system.

### INDUSTRIES SOLUTIONS



Education



Retail



Government



Healthcare



Hospitality




Bank



Office



Factory

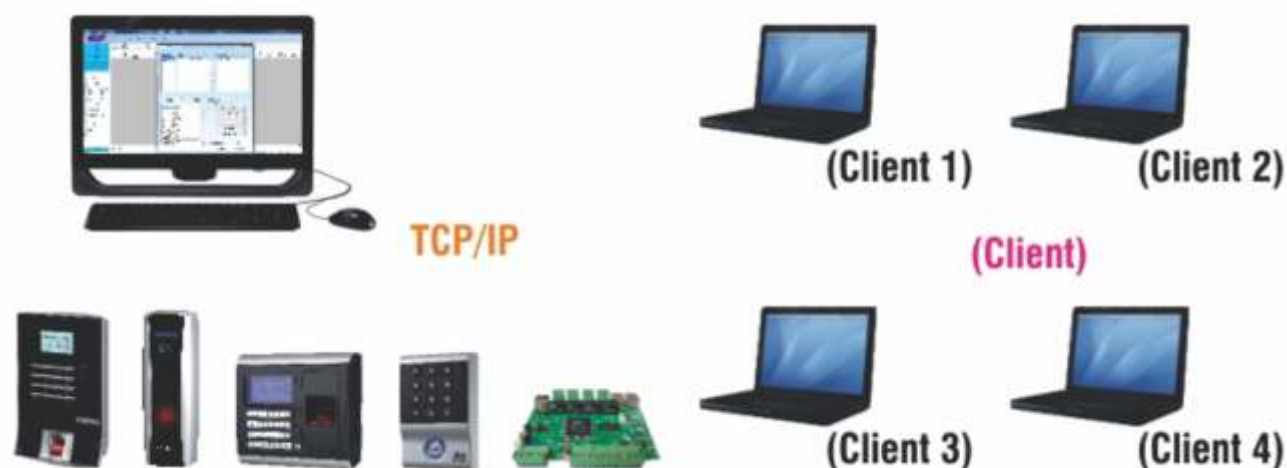

## Technical Specification

|                                    |                                      |
|------------------------------------|--------------------------------------|
| Verification Mode                  | Fingerprint/Card/Password            |
| Template Capacity                  | 9,590                                |
| Display                            | 2.8 inch Blue Display                |
| Resolution                         | 500dpi                               |
| Sensing Area                       | 16 x19mm                             |
| 1:1 Verification time              | <600msec                             |
| 1:1,000 Identification time        | <760msec                             |
| Card Capacity                      | 20,000                               |
| Communications                     | TCP/IP, Wiegand/RS485                |
| Inbuilt Relays(Max. Power Loading) | Door Lock/Ring(0.5A 120VAC/1A 30VDC) |
| Option                             | USB                                  |
| System Log                         | 1,536                                |
| Entry Log                          | 51,968                               |
| Time Set/Time Zone/Group           | 255/120/255 Sets                     |
| Function Key Setting               | 400 (Auto/Manual)                    |
| Anti-Pass Back/Anti Duress         | Yes/Yes                              |
| Power Consumption                  | 780mA $\pm$ 5%                       |
| Power Requirement                  | 9V~12V 1A                            |
| Operation Temperature              | 0 $^{\circ}$ C~55 $^{\circ}$ C       |
| Dimension/Weight                   | 130x145x51.5mm/450g                  |
| Push Technology                    | Logs Data Real Time Push             |
| Dimension/Weight                   | 160.2 * 140.2 * 46.7 mm / 0.6 kg     |

### MANTRA SOFTECH (I) PVT. LTD.

E-mail: [sales@mantratec.com](mailto:sales@mantratec.com),

Website : [www.mantratec.com](http://www.mantratec.com)

CHANNEL PARTNER