

BIOWEB-B3

Web Enabled Attendance & Access Control Terminal



Fingerprint



RFID Card



TCP/IP



USB Host



Access Control



Web

Fast Registry Function, Proprietary Access Control Software Provide, Real-Time Log looks up/Download/Export Reports (Web Server & Software), Support Multi-Badge Function Selectable Bypass mode: Registered/Facility Code/All, Easy setup for Anti-Passback function

INDUSTRIES SOLUTIONS



Education



Retail



Government



Healthcare



Hospitality




Bank



Office



Factory

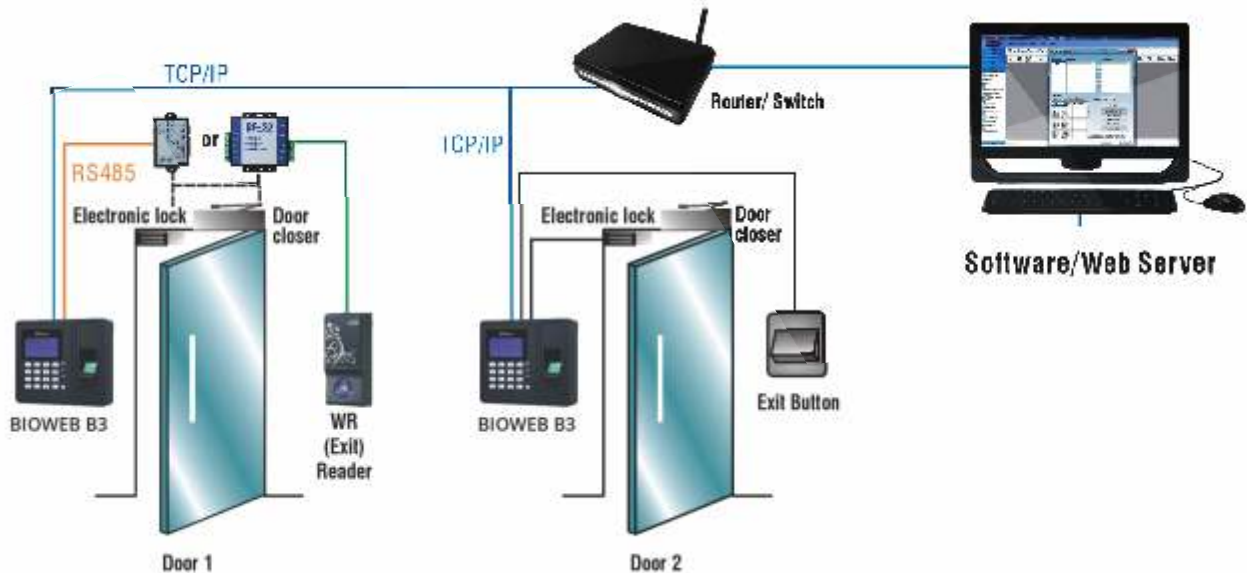

Technical Specification

Verification Mode	Fingerprint/Card/Password
Fingerprint Capacity	1000
Display	2.8 inch inch blue background with black characters
Resolution	500dpi
Sensing Area	16 x19mm
1:1 Verification time	<600msec
1:1,000 Identification time	<760msec
Card Capacity	20,000
Communications	TCP/IP, Wiegand/RS485
Inbuilt Relays	Door Lock/Ring
Option	USB/Voice
System Log	1,536
Entry Log	51,968
Time Set/Time Zone/Group	255/120/255 Sets
Function Key Setting	400 (Auto/Manual)
Anti-Pass Back/Anti Duress	Yes/Yes
Power Consumption	780mA ± 5%
Power Requirement	9V 1A
Operation Temperature	0°C ~55°C
Dimension/Weight	130x145x51.5mm/450g
Push Technology	Logs Data Real Time Push
Dimension/Weight	160.2 * 140.2 * 46.7 mm / 501 g

MANTRA SOFTECH (I) PVT. LTD.

E-mail: sales@mantratec.com,

Website : www.mantratec.com

CHANNEL PARTNER