

BIOWEB-C3

Web Enabled Attendance & Access Control Terminal



Fingerprint



RFID Card



TCP/IP



USB Host



Access Control



Web

Access Control/ Attendance Management two in one Web Server Management as well as Software package provide TCP connection, single door to multidoor management become possible IP Camera integrated can be live monitoring when system users punched

INDUSTRIES SOLUTIONS



Education



Retail



Government



Healthcare



Hospitality




Bank



Office



Factory

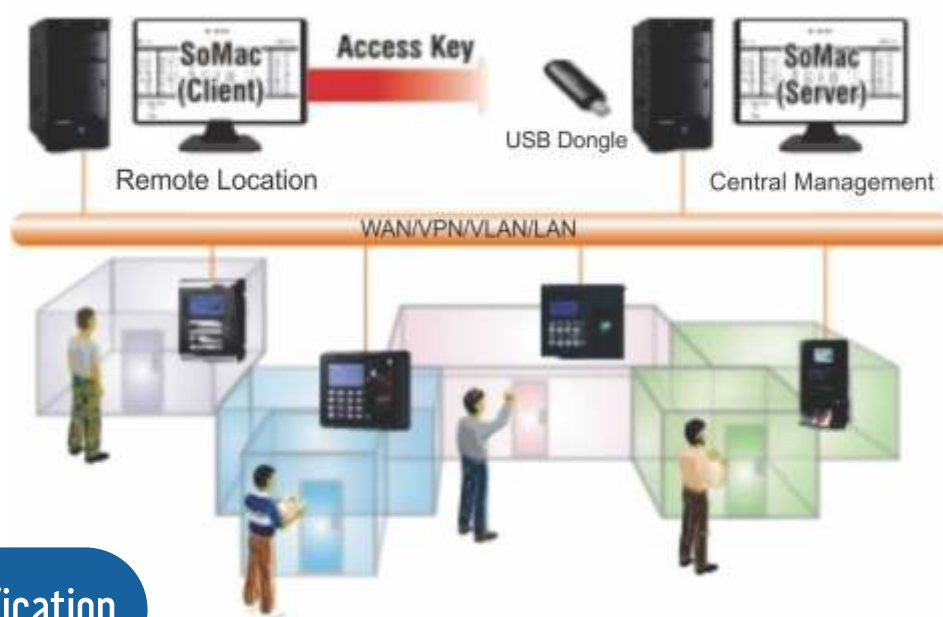

Technical Specification

Verification Mode	FP/Card/Password
Template Capacity	9,590
Sensor Type	Optical
Resolution	500dpi
Sensing Area	16 x 19mm
Template Size	256-384 Bytes
Image Size	272 x 320 (pixel)
1:1 Verification time	<600msec
1:1000 Identification time	<760msec
Card Capacity	20,000
Communications	TCP/IP, Wiegand/RS485
Inbuilt Relays	Lock/ Ring
Option	USB
System Log	1,536 entries
Entry Log	51,968 entries
Time Set/Time Zone/Group	255/120/255 Sets
Function Key	400 (Auto/Manual)
Anti-Pass Back/Anti Duress	Yes/Yes
Power Consumption	780mA ± 5%
Power Requirement	9-24VDC/1 A
Operation Temperature	0°C-65°C
Operation Humidity	5%-80% RH

MANTRA SOFTECH (I) PVT. LTD.

E-mail: sales@mantratec.com,

Website : www.mantratec.com

CHANNEL PARTNER