


# WEBPASS-M

IP Based Standalone Access Control Reader



## INDUSTRIES SOLUTIONS

Government | Corporate | Large Enterprises  
Financial & Education | Retail | Hospitality  
Shopping Malls | Healthcare

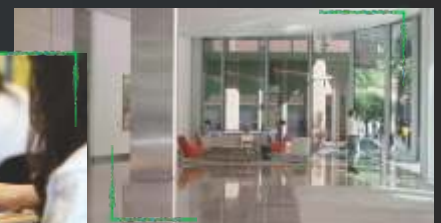

Webpass IP Reader is a standalone, PoE option module, IP65 rated weather proof RFID access controller reader, which can be connected with more than one Webpass readers over single intranet (LAN).



## Technical Specification

Verification option	Card, Card + Pin, Pin
Dimension(L*W*H)mm	120*80*28mm/150g
Card format	125 KHz (EM/TM), 13.56 MHz (Mifare), HID
Reading range	7~12 cm (EM/TM), 3~5 cm (Mifare/HID)
Wiegand input	1, WG24/36 reader
Capacity	20000 users
Log data	60000 entries
Relay Time for door open	1~60000 sec.
Fire alarm input dry connector	1
Communication speed	10/100M
Relay Time for Alarm	0~600 sec.
Fast Registry	Yes
Anti Pass Back/Anti Duress	Yes / Yes
Power Requirement	9~24VDC/1A
Operation Temperature	0? ~55?
Operation Humidity	5%~80% RH

MANTRA SOFTECH (I) PVT. LTD.  
 E-mail: [sales@mantratec.com](mailto:sales@mantratec.com),  
 Website : [www.mantratec.com](http://www.mantratec.com)

CHANNEL PARTNER